



Product introduction



SHIELD BLIND

Vehicle Visor

CONTENTS



01 Product Summary **02** Product Specifications

03 Product Material **04** How to use

05 How to install **06** Product Color

07 Cover Design **08** Test Report

09 Practical use example

1. Product Summary



- ❖ The Vehicle visor of Shield blind is a compact blind with convenience and functionality.
- ❖ Double cell structure of Honeycomb fabric blocks both heat and cold.
- ❖ In addition to UV protection, the sun is softly transmitted to create a beautiful silhouette.
- ❖ Installation is simple because it is inserted into the vehicle door packing part.
- ❖ It is easy to detach, remove, carry and store.
- ❖ It is possible to use for promotional purposes by creating customized designs of corporate logo and using for publicity and promotion.

2. Product Specifications

This is Shield Blind Vehicle visor



For Car

It is compact blind only for car



Easy

It is easy to use by inserting into the door packing part



UV cut

It has Sunscreen effect.



Anti-Microbiality

Antimicrobiality functions can remove odors

A.N.D...



Improve indoor air condition by adsorbing dust

2. Product Specifications


Shield blind Vehicle visor is different



- ❖ This is ultra-fast vehicle sun visor that fits into a window rubber pack



- ❖ The window can be lifted and lowered freely as it is placed in a gap in the packing

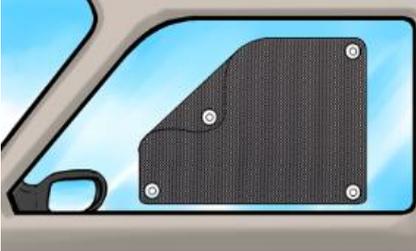

- ❖ It's not pressure type, so there's no fear of falling down



- ❖ It's not attachment type, so there's no fear of contamination by the glue



- ❖ Easy to remove, fold and store when not in use



- ❖ A honeycomb fabric to offer soft silhouette, taken as a bonus

3. Product Material


Honeycomb fabric of the Shield blind Vehicle visor is used for high-quality blind products

- ❖ Honeycomb fabric of Honeycomb structure fabric has internal air layer. So it blocks moisture, heat and cold

- ❖ It has excellent resilience and there is no product deformation

- ❖ The fabric is soft enough to create a free form

- ❖ The silhouette, which is shown through sunlight, creates a refined atmosphere

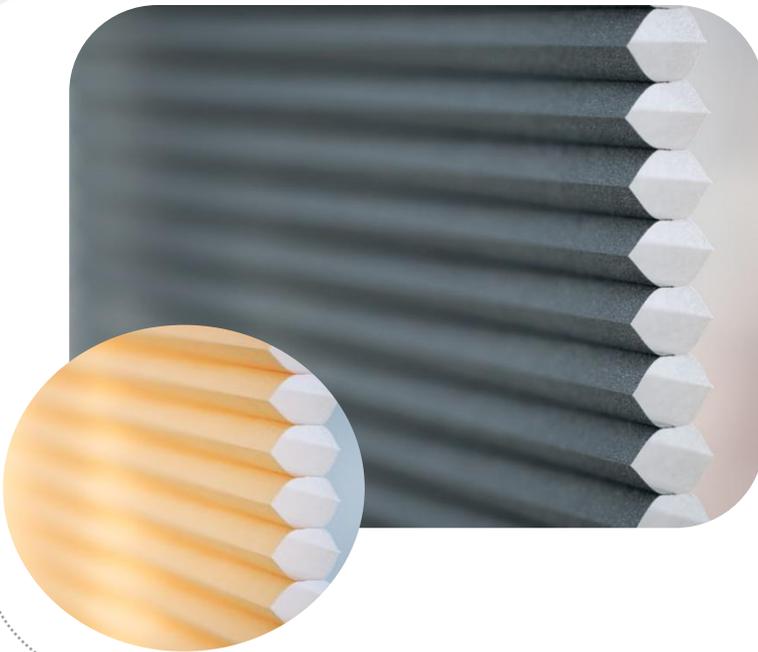


4. How to use



Shield blind Vehicle visor is easy to use and has various usage

How to Use

Put into rubber-finished gap

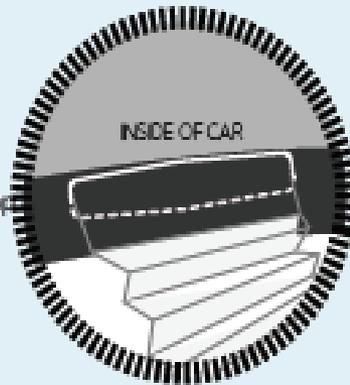

- ❖ Insert the cover into the gap of rubber finish on the door
- ❖ It can be inserted into the upper, bottom and side parts of the door.
- ❖ You can move it up, down, left and right according to the position of the sunlight
- ❖ Depending on the location of the attachment, various productions are possible
- ❖ It can be used regardless of the vehicle type, and it is convenient to detach, remove and store

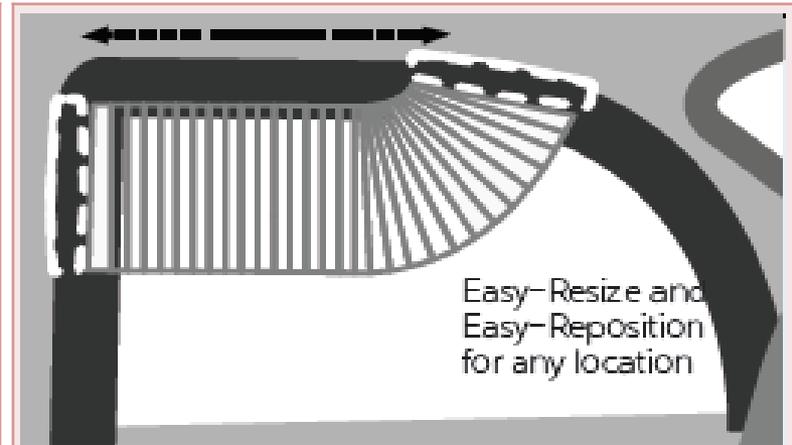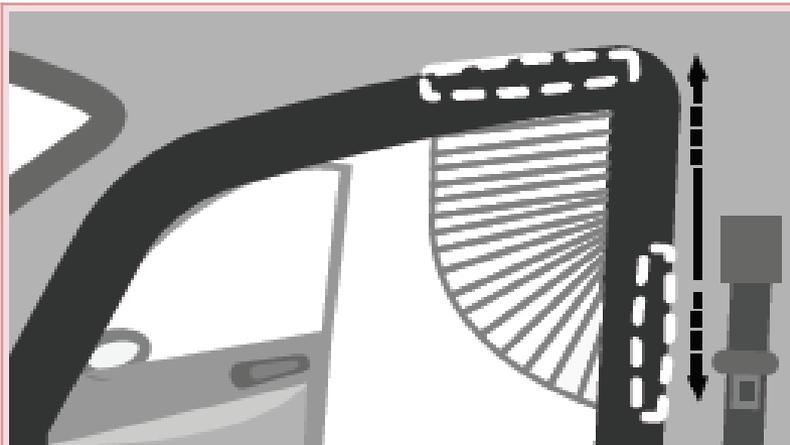

5. How to install

Shield blind Vehicle visor is easy to install



1. Insert the cover of the product into the packing gap in the upper part of the door

2. It bends gently to the side or bottom

3. You can bend or hang it to the desired position


4. Insert the cover of the product into the packing gap on the side of the door

It is securely fixed to the door packing, you can freely move the window up and down

6. Product color



Shield blind Vehicle visor has a variety of colors

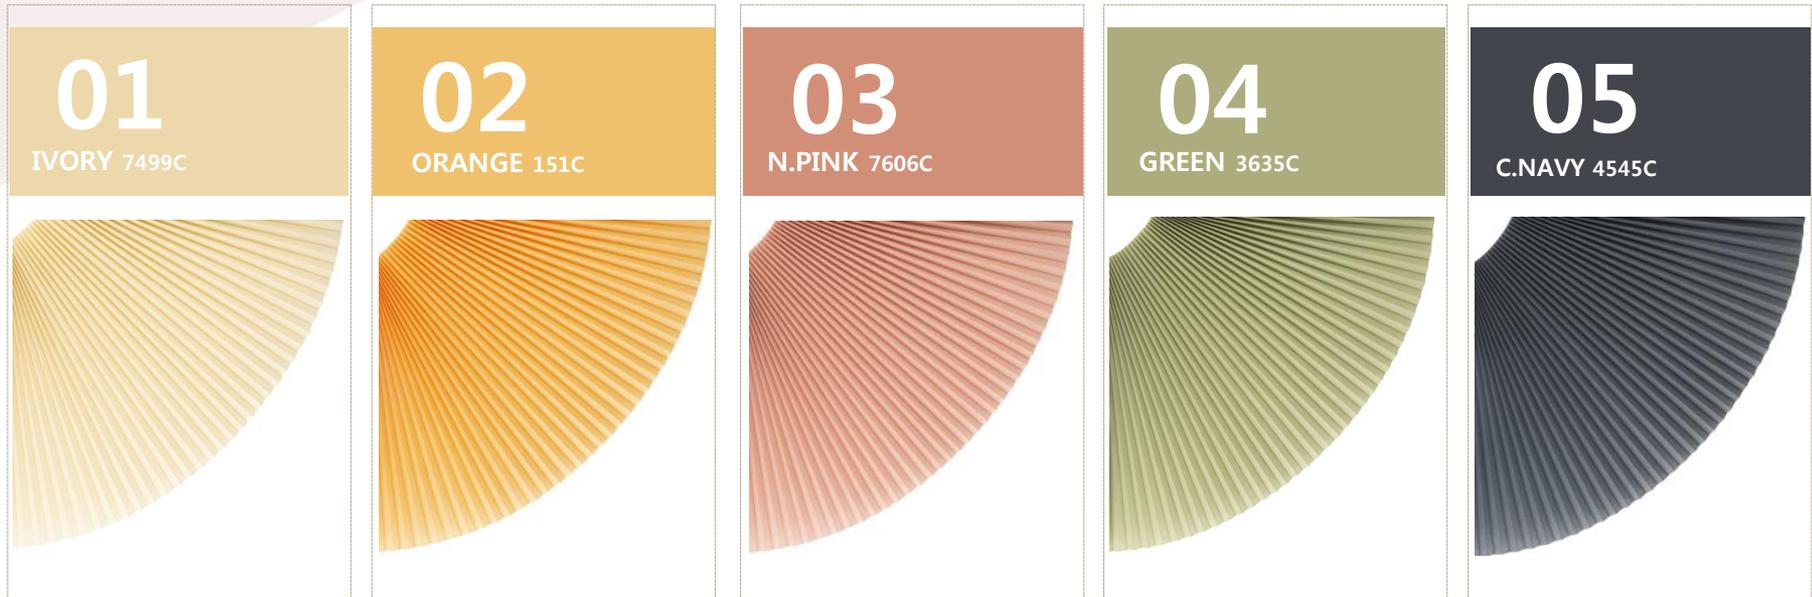


Shield blind Vehicle visor creates a soft mood interior with refined color

We match the colors of the car seats and product, and various colors will be released


7. Cover design

Shield blind Vehicle visor can produce various covers and is also used for publicity and sales promotion

Product Lineup_Coming soon in Korea

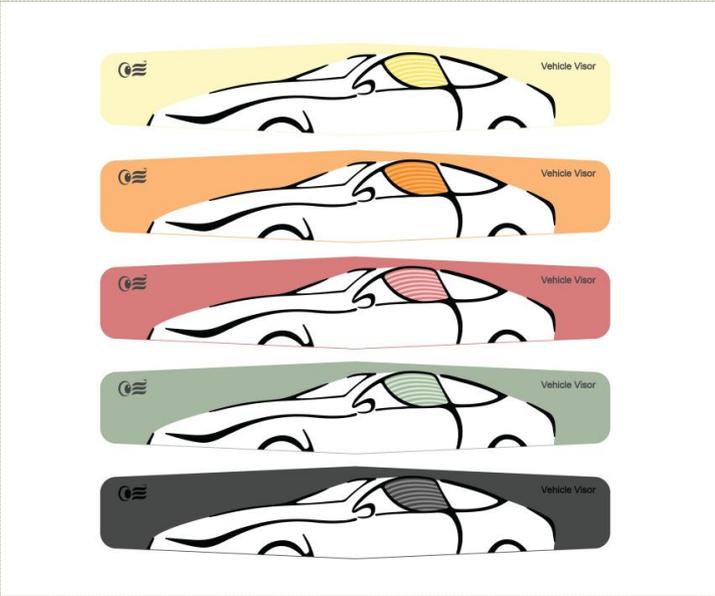

Promotions, event products_Sample

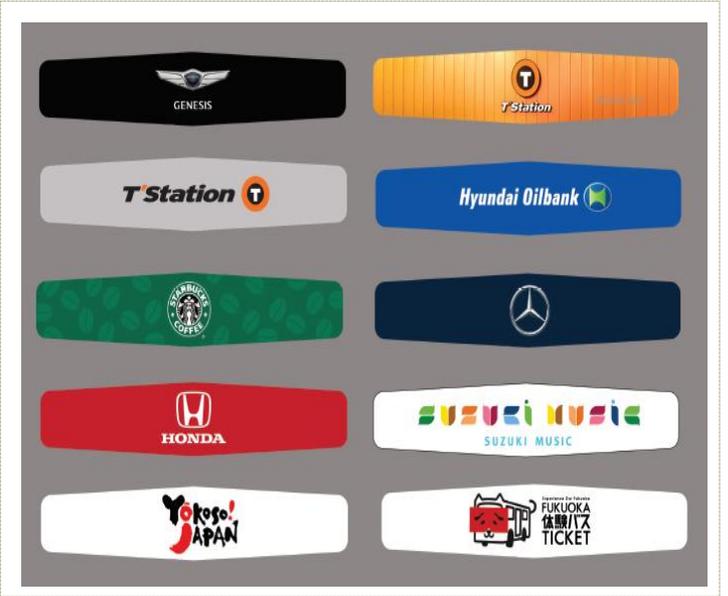

Various covers are designed

You can design the logo on the cover when ordering

The product is about to be released by request

It is used for publicity and promotional events

8. Test reports

The Shield blind vehicle visor has been validated for functionality



UV blocking



TEST REPORT

01. 자외선차폐율 (KS K 0809 : 2014) : %

자외선A(UV-A) 차단율	99.2
자외선B(UV-B) 차단율	99.0
자외선C(UV-C) 차단율	99.0
자외선(UV) 차단율	99.2

최대 차단률 : 99.2%

Max_99.2%



Antimicrobially



TEST REPORT


02. 항균도 (KS K 0809 : 2016) : 세균수/㎡, 정균감소율 %

초기균수	2.2 x 10 ⁶	93.3
균종 1 18 시간 후	1.2 x 10 ⁶	
정균수/㎡	-	99.3
초기균수	1.6 x 10 ⁶	
균종 2 18 시간 후	4.2 x 10 ⁵	
정균수/㎡	-	93.3

A test_99.9% / B test_93.3%



Dust adsorption

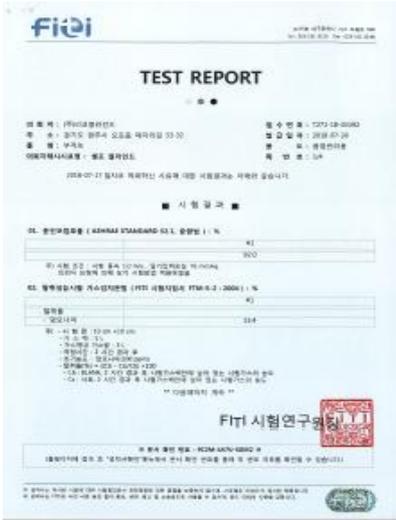

TEST REPORT

03. 먼지흡착률 (ASTM F468-03) : %


흡착률	92
흡착시각	154

Max : 92%

9. Practical use example

This is the actual image that is being used regardless of vehicle type


SEDAN

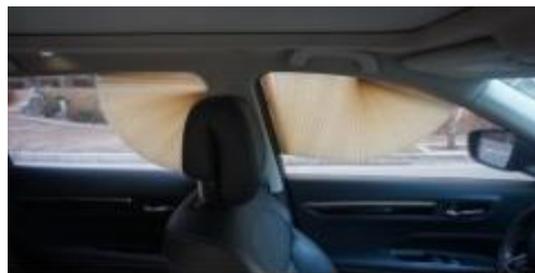

SUV



Mini-Bus

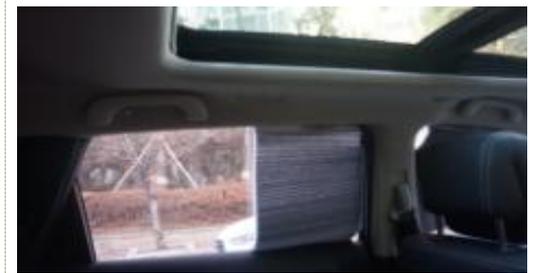



SHIELD BLIND

Vehicle Visor

Thank you